

SPECIFICATIONS

General information

- 60cm square all steel construction
- Protection from corrosion by paint finish.
- Class "A" fire spread rating.
- Non-combustible material.
- Available with or without galvanized slide damper.
- Concentrated load rating up to 450 kg.

UNDERSTRUCTURE OPTIONS

- 60cm Bolted Stringer 120cm Bolted Stringer

COVERING OPTIONS


Tile factory laminated with top set trim edge

- 1.6mm HPL _____ (Color) _____
- 1.6mm Conductive HPL _____ (Color) _____
- 3.2mm HPL _____ (Color) _____
- 3.2mm Conductive Vinyl _____ (Color) _____
- 3.2mm Static Dissapative Vinyl _____ (Color) _____

Tile factory laminated with integral trim edge

- 1.6mm HPL _____ (Color) _____
- 3.2mm HPL _____ (Color) _____
- 1.6mm Conductive HPL _____ (Color) _____
- 1mm HPL _____ (Color) _____

(1mm HPL available in Formica only)

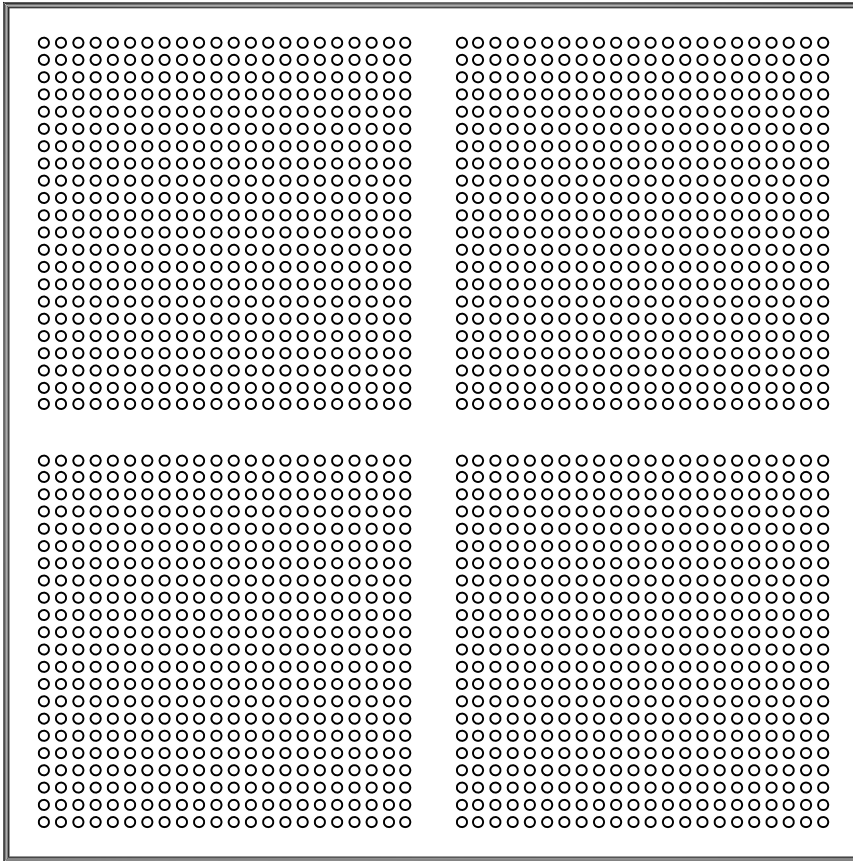


TOP VIEW

AIR FLOW PERFORMANCE (Without Damper)			
Pressure / Airflow		Pressure / Airflow	
Pa	L/s	H ₂ O	CFM
50.0	495	0.2	1050
45.0	467	0.18	990
40.0	446	0.16	944
35.0	418	0.14	886
30.0	386	0.12	818
25.0	352	0.1	746
20.0	314	0.08	666
15.0	276	0.06	584
12.5	251	0.05	532
10.0	225	0.04	476
5.0	157	0.02	332


Full hard cold rolled steel top sheet

Epoxy paint finish inside/out

Draw quality steel bottom pan

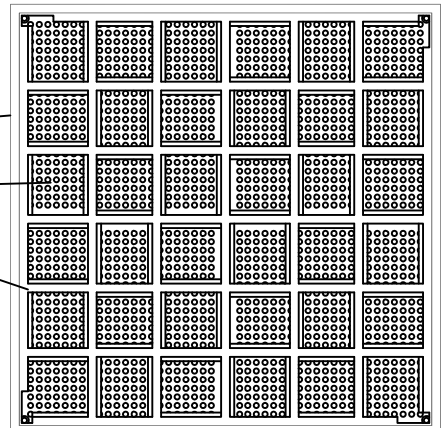

BOTTOM VIEW

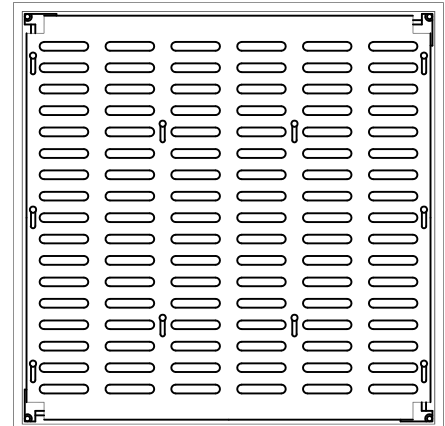

BOTTOM VIEW WITH DAMPER