

# Tate Hardwood Tile

## Natural Luxury Finish for Access Floors



Tate's engineered wood tile is a natural wood wear layer bonded to an Albasia wood backer board. Available in two standard patterns the finish is made from reclaimed timber waste that can equal up to 90% of the wear layer. The 100% Albasia wood backer is a rapidly renewable tropical species that is compressed and laminated into vertical ply. The sides of the tile are square with the top edges beveled. The surface of the tile is coated with High Solids oil that penetrates deep into the wood providing a durable finish.

Scratches, wear patterns or fading can be easily repaired. Routine maintenance is low tech and relies on the use of relying on damp mopping, sweeping / vacuuming, and the use of botanical oil soap to clean, hydrate and sustain wood luster. For areas of high traffic, soil and damage, restoration can be done without having to sand the floor - by using compatible cleaner, and buffed in ecological repair oil to the effected areas to bring back the original appearance of the wood.


To receive more information on Tate's Hardwood Tile, please contact Tate at 800-231-7788 or visit [www.tateaccessfloors.com/products/finishes.aspx](http://www.tateaccessfloors.com/products/finishes.aspx).



### Tate Hardwood Tile

- Made of a 3.4mm natural wood bonded to 11mm Albasia wood backer
- Sanded smooth and finished with an eco certified botanical oil for a long lasting durable finish
- All wood construction
- Square sides with top edges beveled
- The backer is made from "compressed" vertical plies of rapidly renewable plantation Albasia.
- Naturally VOC free
- Virtually free of petroleum products and carrying a long potential use has minimized its environmental footprint
- No harsh chemicals required to clean hardwood tile

A recent study\* conducted by Johnson Controls, Haworth and IDEA found that over 50% of people prefer wood finishes in the workplace.

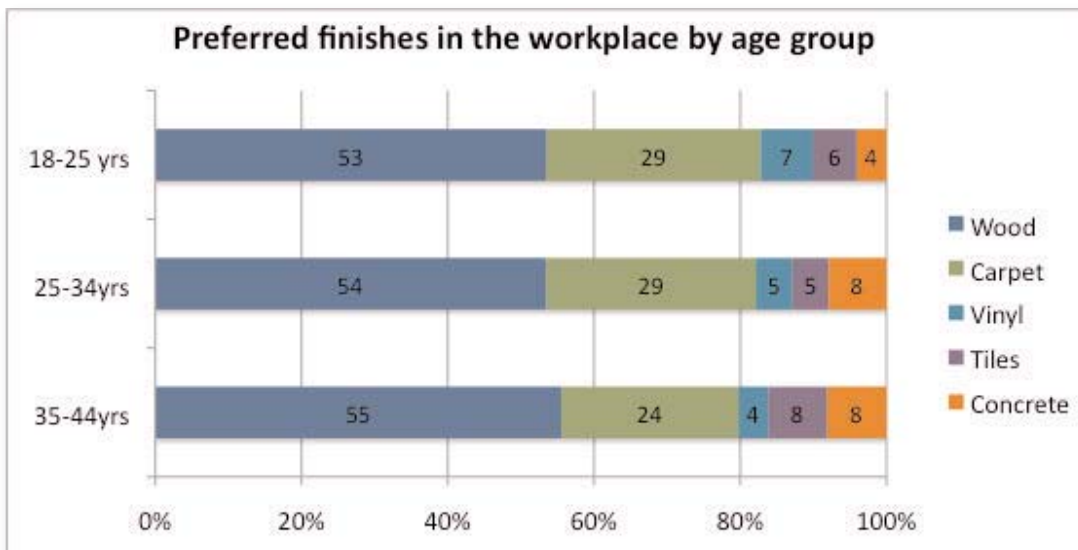

\*Generation Y and the Workplace Annual Report 2010

**Factory laminated for fast easy installation.**



**Routed Monolithic edge provides a durable finish.**



**White Oak Natural**



**White Oak Dark**

## Hardwood Tile Specifications

### Product Description

Tate Hardwood is an all timber engineered wood tile made up of a 3.4mm natural wood wear layer bonded to a rapidly renewable Albasia wood backer board. The finished product is naturally VOC free and contains a minimum of 75% recycled content.

### Storage

Prior to installation the tile should be stored in a controlled environment inside the building for 48 hours at a minimum

temperature of 70 degrees F. Pallets of panels should be broken down to facilitate the warming process. Keep all traffic off the completed floor for 24 hours.

### Technical Data

- Tate hardwood is a 24" x 24" square edge engineered wood tile. The tile is 14mm thick overall with a top beveled edge and a sanded and oiled top surface.