

### SPECIFICATIONS

#### General information


- Panel weight : 5.66 lbs./ft<sup>2</sup> bare.
- 1" thick high density FSC NAUF composite core. Core has no added urea formaldehyde and is certified by the Forest Stewardship Council.
- 1-1/16" inches deep with no covering.
- Protected from corrosion using a hot dipped galvanized top sheet and bottom pan.
- Class A flame spread rating.
- ULC File Number R16784

### UNDERSTRUCTURE OPTIONS

- Bare cornerlock to accept carpet tile application



The mark of responsible forestry

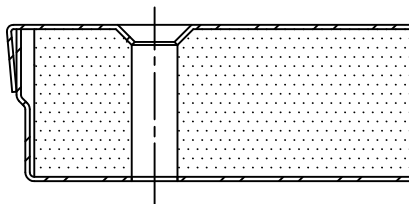

BARE CORNERLOCK VERSION

#### System Performance Criteria

System performance criteria are the most important to consider because they represent the performance in a typical installation. Panel only criteria such as concentrated load is often used to specify floor systems however, the test is not representative of an actual installation because it is performed with the panel resting on blocks, not actual understructure.

#### System Performance Criteria (Tested on Actual Understructure)

System Type		SYSTEM WEIGHT	STATIC LOADS		ROLLING LOADS		IMPACT LOADS
Panel	Understructure		Design* Loads	Safety Factor* (min. 2.0)	10 Passes	10,000 Passes	
WC5000/24" FSC NAUF	Cornerlock	6.90 lbs / ft <sup>2</sup>	1000 lbs	Pass	1000 lbs	700 lbs	150 lbs

\*Design loads and safety factors are defined in the Technical Resources/Technical Bulletins area of the web-site under "Design Loads". All other tests are conducted under CISCA's recommended test procedure for access floors.